



BiMobile Dual Mobility System

cementless & cemented

Many years of experience with successful implant systems and fixation concepts as well as the latest material and coating technologies have been taken into account and used in the design of this dual mobility acetabular system. The result is the versatile Link BiMobile Acetabular Cup System.

The Link BiMobile Dual Mobility System exists in two versions:

A cementless and a cemented version. Both versions' metal shells are made from biocompatible and resilient EndoDur CoCrMo material^{1,2}, which creates significantly less polyethylene abrasion than stainless steel.³

The inner surface is mirror polished to further minimize wear.^{1,2,3}

BiMobile Dual Mobility System – Shells, cementless

The cementless Link BiMobile Acetabular Cup is available with a TiCaP double coating. The TiCaP double coating combines a highly porous surface to achieve primary fixation and an osteoconductive calcium phosphate coating, which together ensure good primary and secondary implant stability.^{5,6}



BiMobile Dual Mobility System – Shells, cemented

The cemented BiMobile Acetabular Cup has a SatinLink finished surface, which is well known from our SP11 stems. Latitudinal and longitudinal grooves strengthen the anchoring and allow air to escape during cementing.



BiMobile Dual Mobility System – Liner


The self-centering inlays²⁰ are available in UHMWPE and E-Dur (X-LINKed Vit-E PE) and can be combined with Link prosthesis heads made of CoCrMo or ceramic with a 22 or 28 mm diameter.



TiCaP Double Coating: Titanium (Ti)/Calcium Phosphate (CaP)

The TiCaP coating is applied by first spraying a highly porous layer titanium of approximately 450 μm^* thick onto the surface of the implant using vacuum plasma technology. On top of this porous surface, an approx. 15 μm thick HX layer of mechanically stable calcium phosphate is deposited in an electrochemical process. Animal experiments have demonstrated ingrowth on 47.9% of the implant surface.⁵

* The thickness of the titanium layers varies in different types of implant depending in their topographical application.

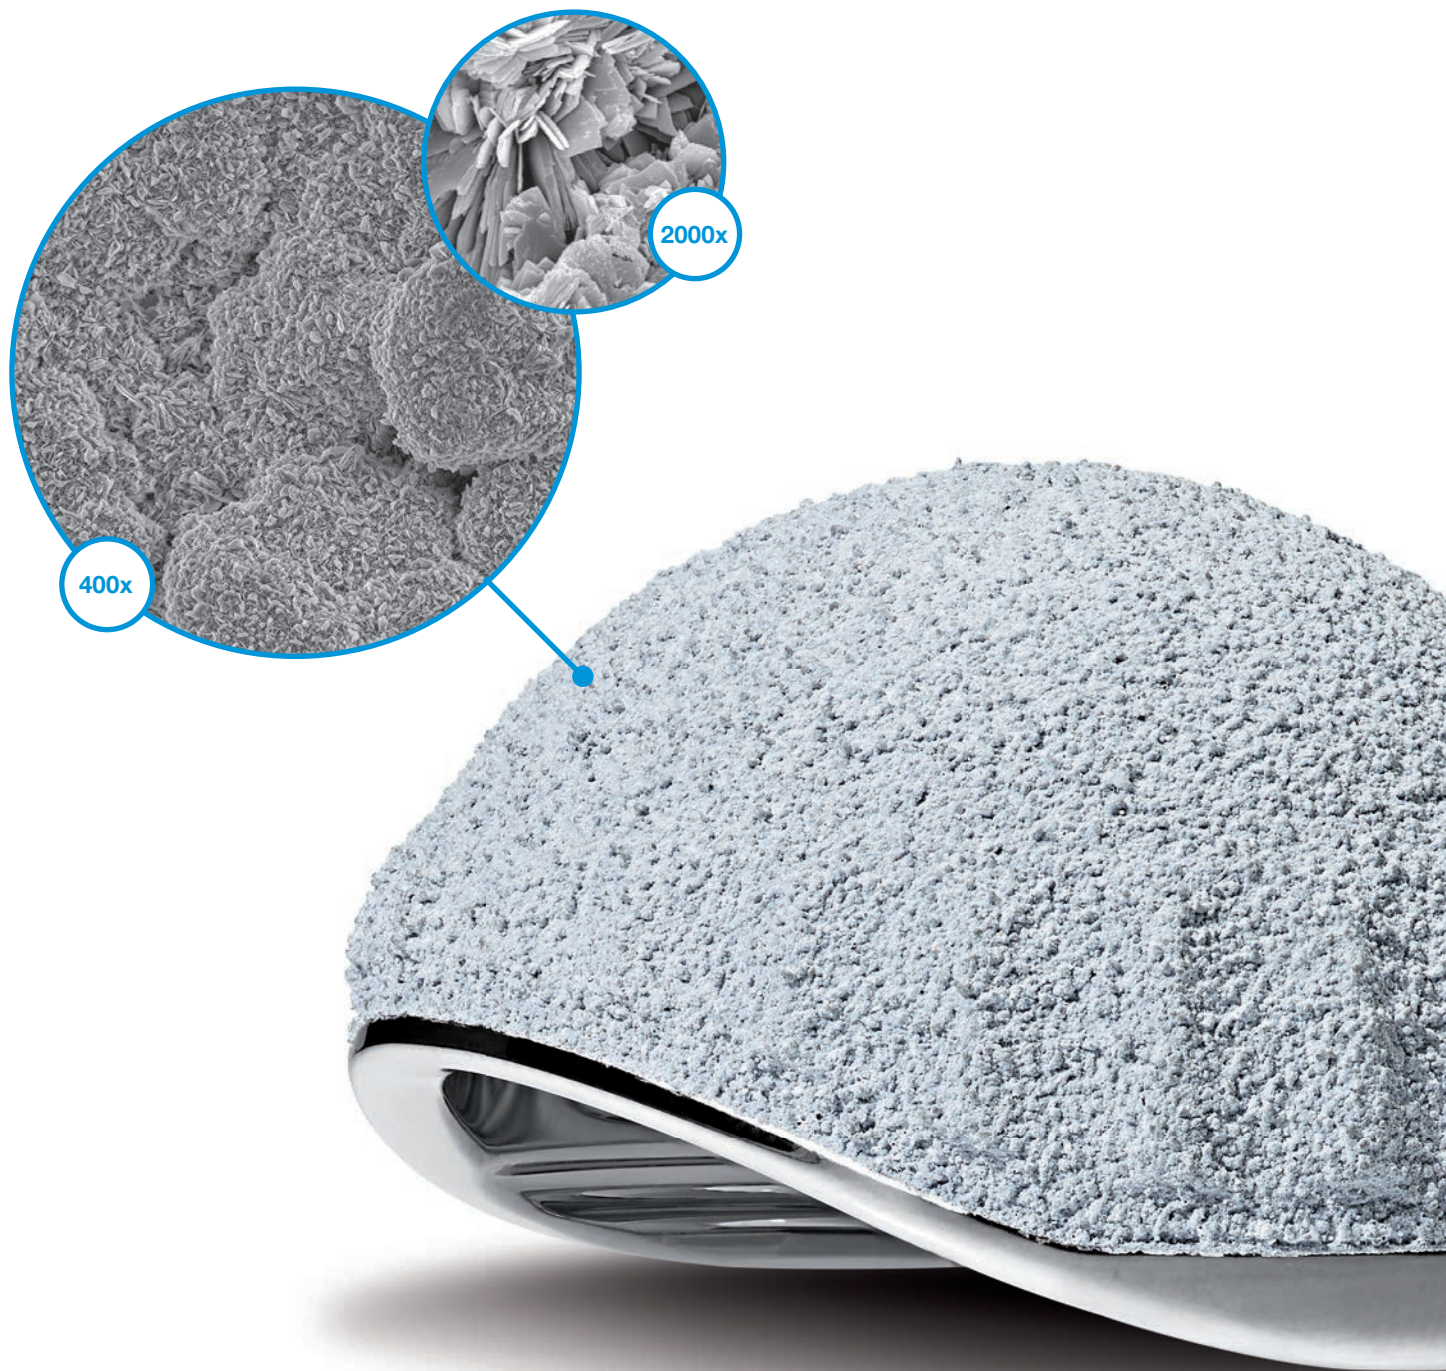

Rough Titanium-Plasma + HX Coating

→ TiCaP

Double layer coating promotes bony ongrowth^{4,5}

Wide size range

- 42 mm - 70 mm shell size
- 28 mm prosthesis heads starting from 48 mm shell size
- For a high ROM and a good anatomical reconstruction

Superior wear resistant shell

made out of biocompatible and resilient EndoDur CoCrMo material^{1,2,7}

Self-centering Liner

promotes even wear patterns and enhances dislocation resistance⁸

Strong retention

of prosthesis head in UHMWPE or E-Dur (X-LINKed Vit-E PE) Liner⁹

Anatomic medio-ventral cut-out

- For reduced impingement and protection of psoas tendon and femoral nerve
- For high range of motion

Adoption of well known fixation concepts

- SatinLink blasted surface
- Proven cement anchorage surface



Macro structure at equator

ensures primary stability¹⁰

Mirror polished inner surface

for minimized wear and a prolonged implant life^{7,11}

Size-adjusted clearance

between metal shell and liner for consistent articulation¹²





Intraoperative Flexibility

with only one instrument Set for cemented and cementless version^{12,13}


Simple surgical experience

through streamlined, reliable and modern instruments with integrated color coding^{12,13}

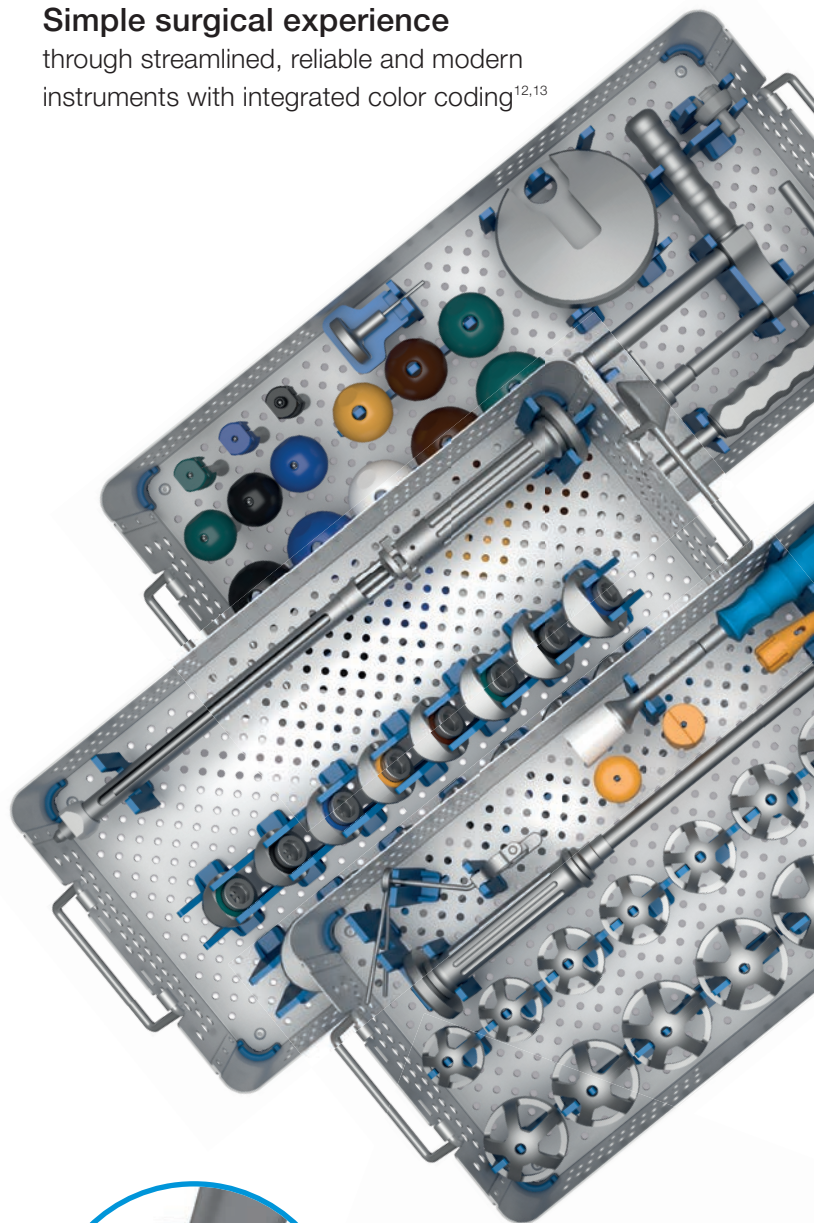

Optimized instrument design

The strong impactor-implant attachment and a good visualisation of implant rim ensures a safe and reproducible implantation.^{12,13}

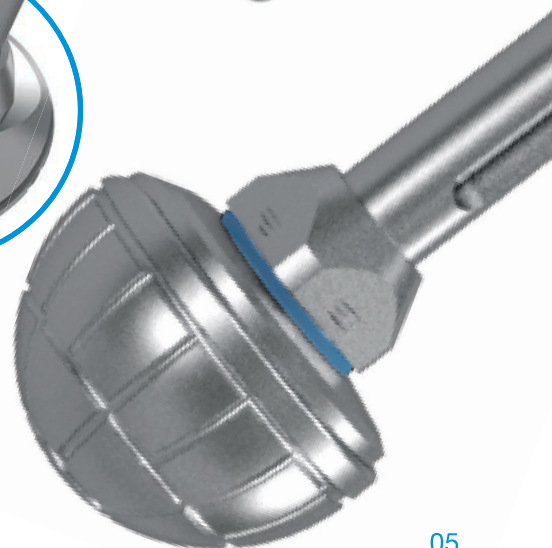


The Dual Mobility concept was developed by Prof. Gilles Bousquet in the 1970s with the aim of avoiding recurrent hip luxations.¹⁴ The System is composed of a shell with a highly polished inner surface in which a mobile polyethylene liner having a pressed in prosthesis head is moving.

High Range of motion with less wear^{15,16,17}

The concept is based on two articulating surfaces where the prosthesis head articulates with the liner and the liner with the shell.



Primary Articulation

The small prosthesis head moves inside the liner until the neck of the stem impinges the liner




Secondary Articulation

The large polyethylene Liner moves freely inside the cup. This movement only occurs in extreme movements.

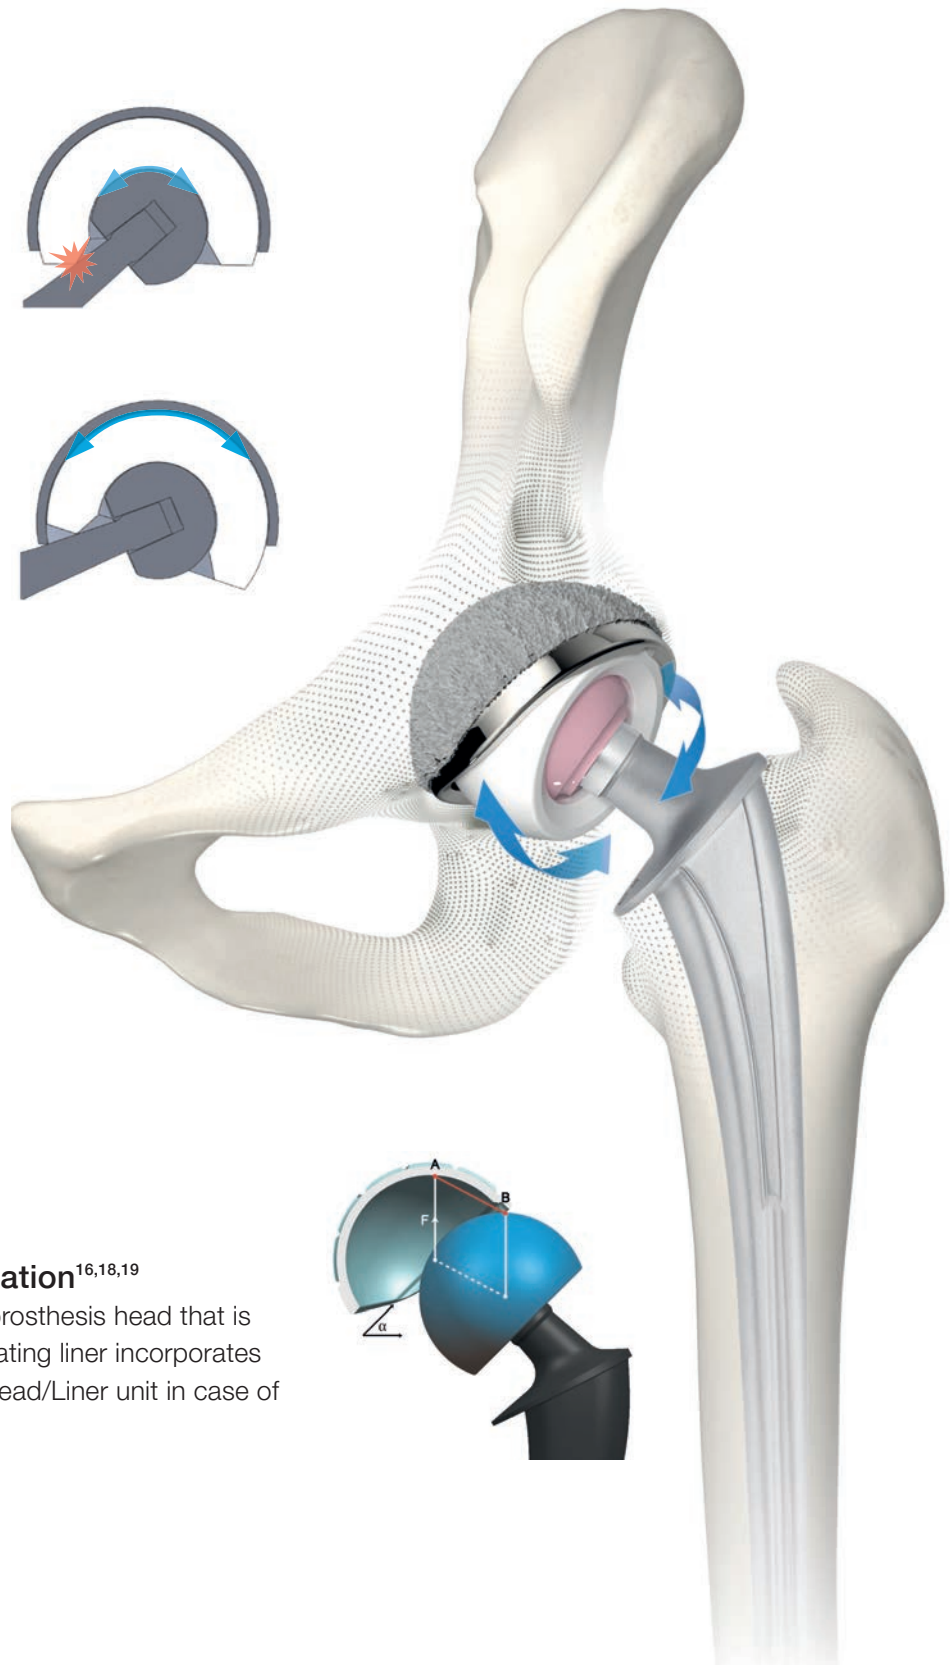

Reduced risk of dislocation^{16,18,19}

The combination of a small prosthesis head that is pressed into the large articulating liner incorporates a high jumping distance of Head/Liner unit in case of sub-luxation.



References (general)

- 1 Internal document W. LINK (DOC-08614)
- 2 Internal document W. LINK (DOC-08725)
- 3 Landolt D., Mischler M., „Tribocorrosion of passive metals and coatings“, Woodhead Publishing in Materials (2011): 342.
- 4 Ullmark G et al.: "Analysis of bone formation on porous and calcium phosphate-coated acetabular cups: a randomised clinical [18F] fluoride PET study." Hip International 22.2 (2012).
- 5 Cunningham B W et al.: "General Principles of Total Disc Replacement Arthroplasty", Spine, Vol. 28, No. 20 Suppl., 2003
- 6 Bobyn, J. D., et al. „The optimum pore size for the fixation of porous-surfaced metal implants by the ingrowth of bone.“ Clinical orthopaedics and related research 150 (1980): 263-270.
- 7 Long, M., & Rack, H. (1998). Titanium alloys in total joint replacement—a materials science perspective. Biomaterials, 19(18), 1621-1639.
- 8 Fabry C, Kaehler M, Hermann S, Woernle C, Bader R. 2014. Dynamic behavior of tripolar hip endoprotheses under physiological conditions and their effect on stability. Medical Engineering & Physics 36:65– 71.
- 9 Internal document W. LINK (DOC-08553)
- 10 Internal document W. LINK (DOC-08695)
- 11 Loving L, Herrera L, Banerjee S, Heffernan C, Nevelos J, Markel DC, Mont MA. 2015. Dual mobility bearings withstand loading from steeper cup-inclinations without substantial wear. J Orthop Res. 33(3):398-404.
- 12 Internal document W. LINK (DOC-08847)
- 13 Internal document W. LINK (DOC-07974)
- 14 Noyer, D., Canton, J. H. (2016). Once upon a time... Dual mobility: history. International Orthopaedics Vol. 41 - No. 3 (March 2017): 611-618
- 15 Charnley, John. „The long-term results of low-friction arthroplasty of the hip performed as a primary intervention.“ Bone & Joint Journal 54.1 (1972): 61-76.
- 16 Philippot, R., Camilleri, J. P., Boyer, B., et al. (2009). The use of a dual-articulation acetabular cup system to prevent dislocation after primary total hip arthroplasty : analysis of 384 cases at a mean follow-up of 15 years. SICOT 33: 927-932.
- 17 Wroblewski, B., Siney, P., Flemin, P. (2009). The principle of low frictional torque in the Charnley total hip replacement. JBJS (Br) Vol. 91-B(7): 855-858.
- 18 Stroh, D. Alex, et al. "Dual-mobility bearings: a review of the literature." Expert review of medical devices 9.1 (2012): 23-31.
- 19 Nevelos, J., Bhimji, S., Macintyre, J., et al. (2010). Acetabular Bearing Design Has a Greater Influence on Jump Distance than Head Size. 56th Annual ORS Meeting: Poster #2028.
- 20 Internal document W. LINK (DOC-08847)

Waldemar Link GmbH & Co. KG, Hamburg

All content in this catalog, including text, pictures and data, is protected by law. Every instance of use, whether in part or in whole and which is not permitted by law, is subject to our prior consent. In particular, this applies to the reproduction, editing, translation, publishing, saving, processing, or passing on of content stored in databases or other electronic media and systems, in any manner or form. The information in the catalogs is solely intended to describe the products and does not constitute a guarantee.

The Surgical Technique described has been written to the best of our knowledge and belief, but it does not relieve the surgeon of his/her responsibility to duly consider the particularities of each individual case.

Products shown in this document may not be available in your country. The product availability is subject to the approval and/or registration regulations of the respective country. Please contact Waldemar Link GmbH & Co. KG if you have questions about the availability of LINK products in your country.

Waldemar Link GmbH & Co. KG and/or other corporate affiliated entities own, use or have applied for the following trademarks in many jurisdictions: LINK, BiMobile, SP II, Modell Lubinus, E-Dur, EndoDur, T.O.P. II, BetaCup, CombiCup PF, CombiCup SC, CombiCup R, MobileLink, C.F.P., LCU, SP-CL, LCP, MIT-H, Endo-Model, Endo-Model SL, MP, MEGASYSTEM-C, GEMINI SL, SPAR-K, LCK, HX, TiCaP, X-LINKed, PorAg, LINK PorEx, BiPorEx, PorEx-Z, TrabecuLink, Tilastan, customLink, RescueSleeve, VACUCAST.

Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks and/or names or their products and are the property of their respective owners.



Waldemar Link GmbH & Co. KG
Barkhausenweg 10 · 22339 Hamburg · Germany
Phone +49 40 53995-0 · info@linkhh.de
www.linkorthopaedics.com

LINK[®]

